

2-in-1 Symmetrical Lighting

Crafted to get your brand recognized at once with double-face domed contour lighting.






320° Glow Outdoor LED Sign Light

Bi-domed neon flex is a 2-in-1 new type of sign light, featuring a pioneering shape owning two back-to-back domed emitting surfaces in one piece, steered towards lighting up your sign clearly at a 320° beam angle and maximizing the attention of masses in more than one direction. At night it becomes a powerful tool to emphasize your brand image as billboard or wall sign lighting. The symmetrical lighting can also suit your needs for a two-way striking illumination layout, in an easier way to highlight the stereo visions of sculptures or run two-side continuous façade wall washing.

Features

★ 320° Beam Angle

The glow emitted nearly forms a 360° shape, together with the optimum luminous efficacy dually leveraged by ClearTech V-Optic™, which contributes to a dramatic visual impact for billboard signs at a great distance.

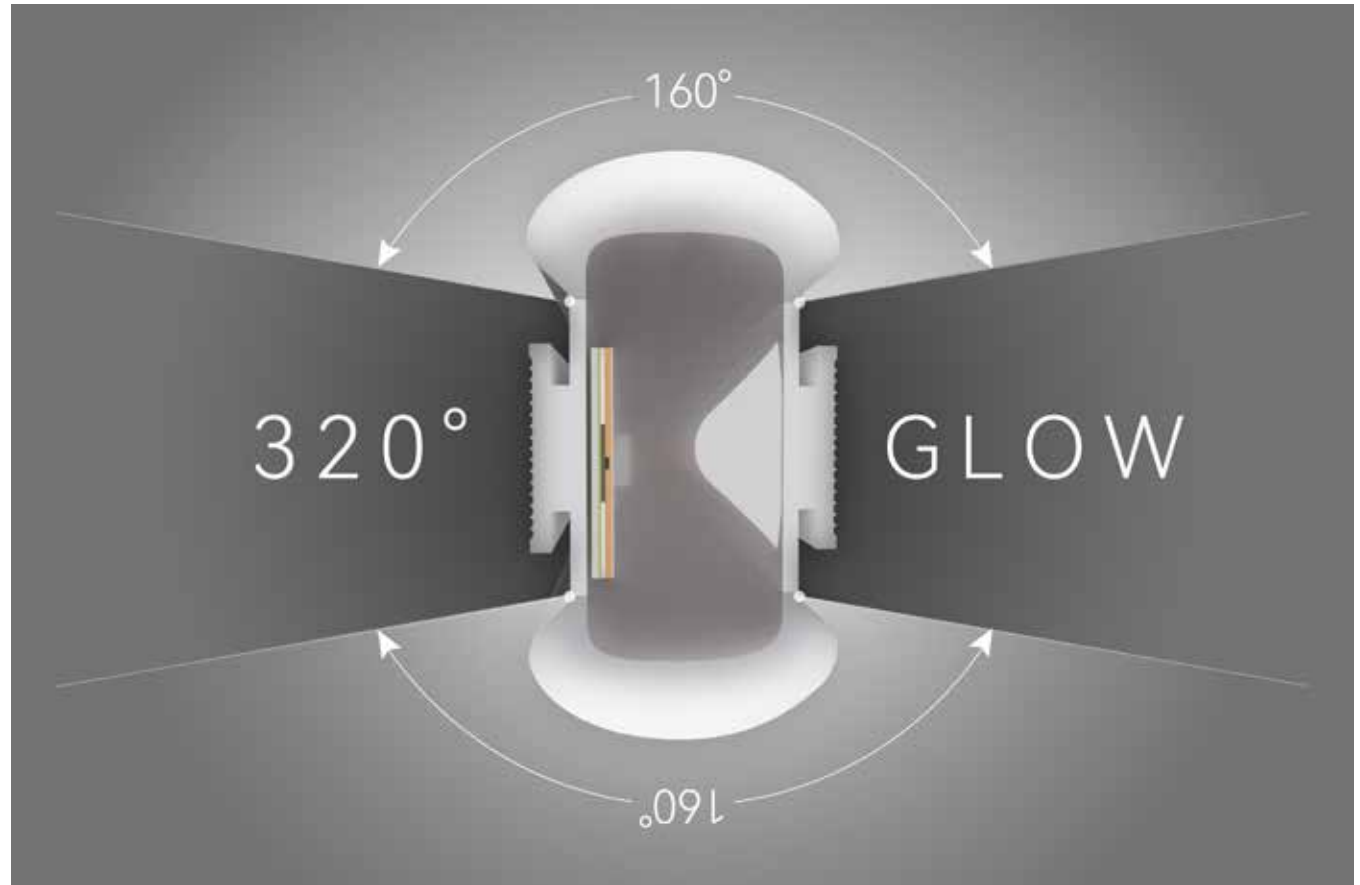

★ Long-lasting Performance

Lifespan is more than 50000 hours, suitable for outdoor environments in a high or low temperature. The long-lasting bright LED light in vivid color helps you to grab more customers to come in when applied to storefront signs.

★ Half Labor Costs

It can realize continuous two-way running illumination only with one piece of light that used to be generated by the doubled lights. The bi-domed neon flex enables you to cut down the number of luminaires and further on the labor cost due to half of the wiring job compared to the regular led signage lights or wall washing lights.


Light





-  3 year Warranty
-  Solvents Resistant
-  UV Resistant
-  Flame Resistant
-  Salt Water Resistant
-  IK08 Protection

45°C
-20°C

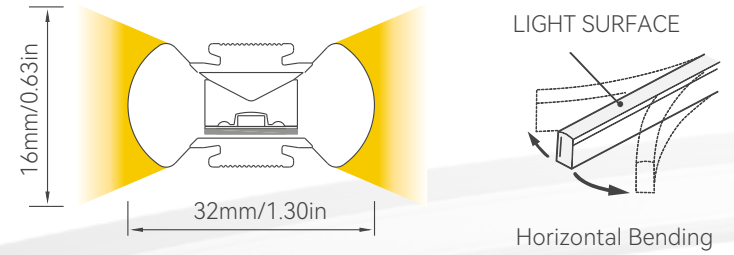
T Ambient Working

Min. Bending Diameter
120mm/4.72in



Article No.	FR-BD1632B-HB-R	FR-BD1632B-HB-A	FR-BD1632B-HB-G	FR-BD1632B-HB-B	FR-BD1632B-HB-W
Light Color	 Red	 Amber	 Green	 Blue	2200K/2700K/3000K/3500K/4000K/5700K
Voltage & Circuit Type	24CC	24CC	24CC	24CC	24CC
Power/m	9W	9W	9W	9W	9W
Lumen/m	300	300	480	95	480
Min. Cutting Length(mm)	125	125	83.3	83.3	83.3
Max. Running Length(m)	13	13	13	13	13

Connector

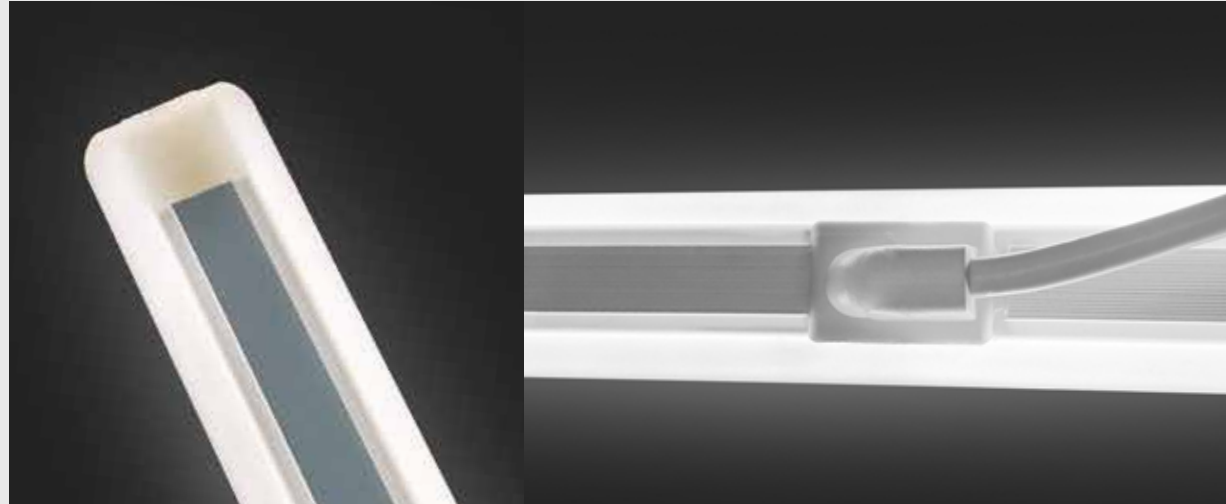


IP67 Injection-moulded Connector -Rear cable entry

- ★ Neat wiring
- ★ Seamless Splicing



Mounting Profile

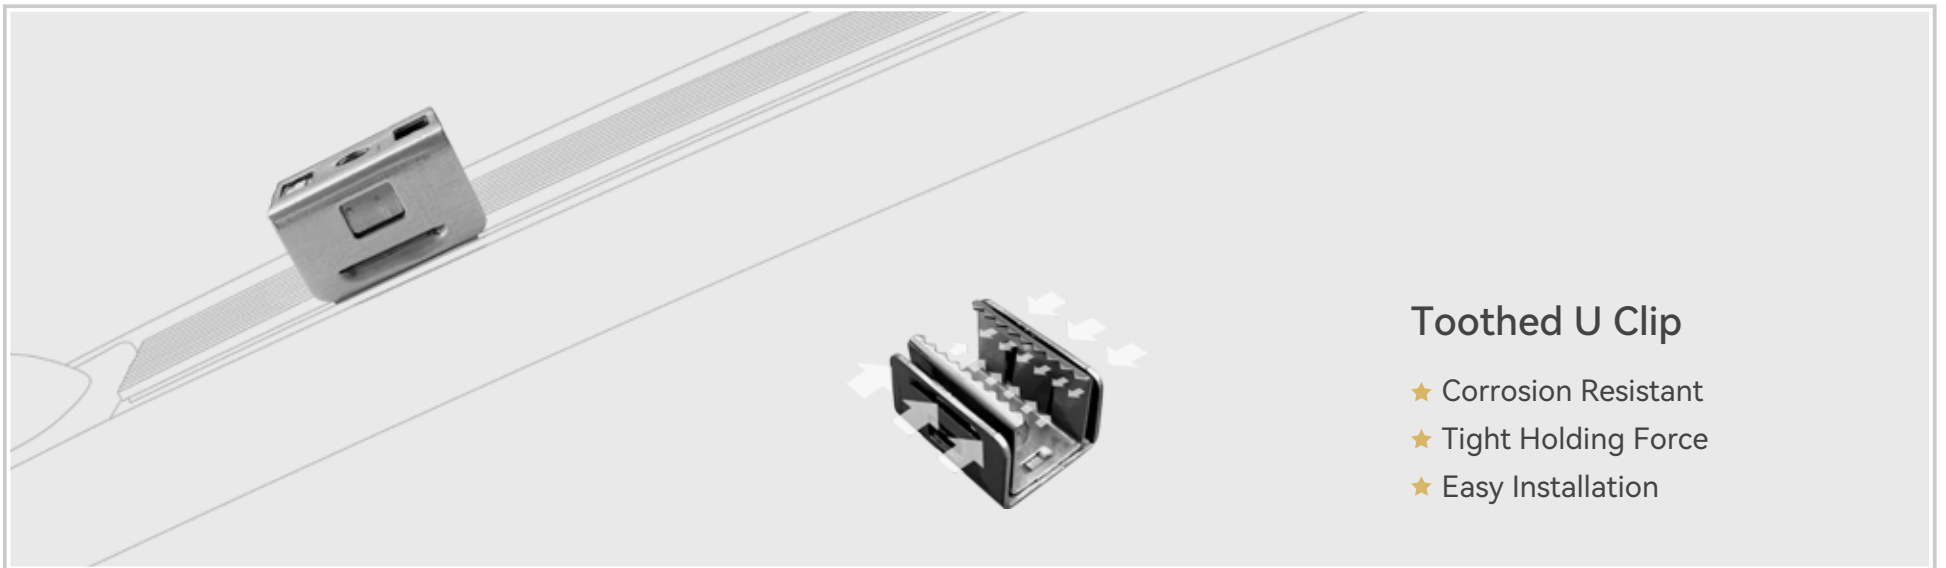

Toothed U Clip

- ★ Corrosion Resistant
- ★ Tight Holding Force
- ★ Easy Installation

Application



External Wall



Indoor



Shop Sign



Outdoor Sculpture